


Smooth, rectangular duct



Transition and connection components can be customised.



Wide selection of accessories: Clamps, sound dampening with insulation, flanges, adapters etc.

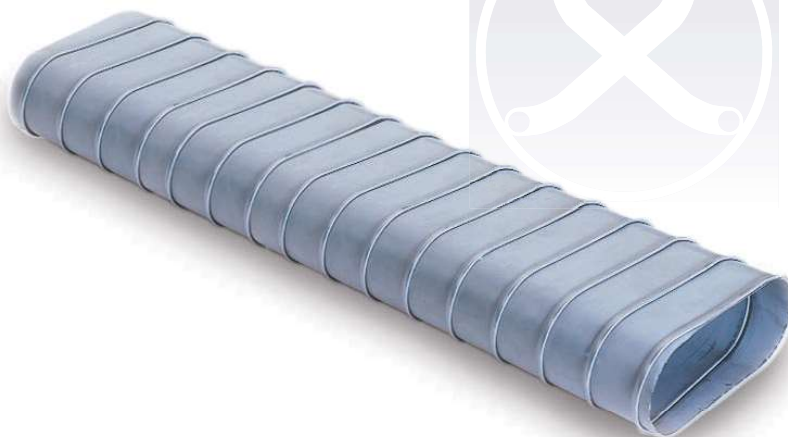

Ordered to customer order, limited stock.

Note that delivery time is normally up to 4 weeks because it is not a stock item.

QUADROFIX

Description	Rigid steel duct with smooth inside for minimal pressure loss.	Properties	Suitable for low spaces, and cut with an angle grinder.
Area of use	Rigid rectangular pipe for straight duct runs, where there is a requirement for a low installation height. Within for example buildings and industries.	Temperature range	+ 200°C
Material	The most common material selection is aluminium or galvanised steel.	Fire classification	Non-flammable
		Accessory	A wide range of accessories is available such as, clamps, sound damping with insulation, flanges, couplings, transitions etc.

Dimensions table

Internal dimension (mm)	System	Standard length
129x52	100	3m
158x70	125	3m
192x80	150	3m
271x80	200	3m